

# Fuzzy models in geotechnical engineering and construction management

Thomas Fetz<sup>a</sup>, Johannes Jäger<sup>b</sup>, David Köll<sup>c</sup>,  
Günther Krenn<sup>c</sup>, Heimo Lessmann<sup>c</sup>,  
Michael Oberguggenberger<sup>a,1</sup> and Rudolf F. Stark<sup>d</sup>

<sup>a</sup> *Institut für Mathematik und Geometrie, Universität Innsbruck,  
Technikerstraße 13, A-6020 Innsbruck, Austria.*

<sup>b</sup> *Beton- und Monierbau Innsbruck GesmbH,  
Bernhard-Höfel-Straße 11, A-6020 Innsbruck, Austria.*

<sup>c</sup> *Institut für Baubetrieb und Bauwirtschaft, Universität Innsbruck,  
Technikerstraße 13, A-6020 Innsbruck, Austria.*

<sup>d</sup> *Institut für Festigkeitslehre, Universität Innsbruck,  
Technikerstraße 13, A-6020 Innsbruck, Austria.*

## Abstract

This article is devoted to a variety of applications of *fuzzy models* in civil engineering, presenting current work of a group of researchers at the University of Innsbruck. With *fuzzy methods* and *possibility theory* as an encompassing framework, the following areas are addressed: uncertainties in geotechnical engineering, fuzzy finite element computation of a foundation raft, fuzzy dynamical systems, processing uncertainty in project scheduling and cost planning.

## 1 Introduction

Traditional engineering models are deterministic: sharp inputs are processed in a structurally determined system to produce a sharp output, which is taken as an approximate prediction of reality. To account for fluctuations, probability theory has been introduced. This shifts the emphasis from sharp input data to sharp probabilities of sharply defined events. Among engineers, there is increasing discomfort with the observed fact that predictions obtained in this way may deviate to such an extent from reality as to render them useless.

For example, a case study [17] concerning the design of a sheetpile wall, in which a number of reputable European engineering companies had agreed to participate, resulted in a corresponding number of seemingly precise predictions. These, however, differed drastically from each other and from the observed behavior of the completed structure.

---

<sup>1</sup>Supported by Österreichische Nationalbank, Jubiläumsfondsprojekt # 5901.

Conspicuous differences between prediction and reality may arise in many areas in the course of the realization of an engineering structure: from site investigations and analysis to scheduling and cost planning. We should be clear about the facts that

- models are approximations to and conjectures about reality;
- the input parameters are known only imprecisely;
- probabilistic methods may fail to capture the information available about the deviations.

The inherent vagueness of modelling procedures can be traced to various reasons, for example: lack of knowledge of boundary conditions; simplification in complex circumstances forcing a single parameter to cover a wider range of situations; lack of a precisely quantifiable definition of some verbally defined variable; uncertainty about future dispositions. However, there is clearly no alternative to employing rational models in the three central activities of engineering: design, construction, and control. Rather, the engineer should face the limitations of the modelling process, put the range of imprecision into the open and make it accessible to responsible assessment by all participants in the construction process. This will involve processing not only data but also the available objective and subjective information on their uncertainty.

We believe that fuzzy set theory provides a framework for accomplishing this task. The power of fuzzy set theory is that it allows a formalization of vague data, a representation of their fuzziness which can be entered into computations and a possibility theoretic interpretation. Assigning degrees of possibility as a replacement of probability appears to be more adapted to formalizing expert knowledge, due to the relaxation of axioms. Working with fuzzy methods forces and allows the engineer to address the uncertainties, see and judge the possible range of outputs the fuzzy model predicts, and gain understanding of the possible behavior of the system, given the imperfect description formulated initially.

The purpose of this article is to demonstrate that fuzzy formulation and computation is possible in a number of engineering tasks ranging from geotechniques to dynamics to project planning. It presents the ongoing work of a group of researchers in construction management, strength of materials, mathematics and numerics at the University of Innsbruck; we refer to the papers [4, 5, 9, 11].

The plan of exposition is as follows. After a short account of the basic notions of fuzzy set theory, we address questions of modelling and uncertainties in geomechanics. This is followed by an investigation of the effect of fuzzy parameters in a raft foundation, the corresponding fuzzy finite element computation, and a discussion of the interpretation. Next, we exhibit some fuzzy ideas on dynamical systems. Finally, we turn to project planning: scheduling and cost estimation. We show that suitable methods of presentation allow a clear exhibition of fuzziness in a network structure, providing means of control under risk. The fuzzy approach gives a lucid picture of the complexities involved when duration dependent costs enter into network analysis. It explains why cost optimization is impossible, but must be replaced by the search for a satisficing solution.

A methodological remark seems in order. We use fuzzy set theory to characterize vague data by intervals of variation, supplied with a valuation. This valuation provides the additional degrees of freedom needed to model uncertainty, to describe and interpret its effects. Numerically, the results are computed by repeated application of deterministic algorithms to all relevant data combinations. The increased computational effort can currently be handled in problems of moderate size.

## 2 Fuzzy sets

This section serves to briefly collect what we need from fuzzy set theory: definition of and computation with fuzzy quantities.

Given a basic set  $X$  of discourse, a fuzzy subset  $A$  is characterized by (and can be identified with) its membership function  $m_A(x)$ ,  $0 \leq m_A(x) \leq 1$ , defined for each element  $x$  of  $X$ . The value  $m_A(x)$  can be interpreted as

- the membership degree of the element  $x$  belonging to  $A$ ;
- the degree of possibility that the variable  $A$  takes the value  $x$ .

Introducing the  $\alpha$ -level sets ( $0 \leq \alpha \leq 1$ )

$$[A]_\alpha = \{x \in X : m_A(x) \geq \alpha\} \quad (1)$$

we arrive at the interpretation mentioned in the Introduction:

The variable  $A$  fluctuates in the range  $[A]_\alpha$  with possibility degree  $\alpha$ .

A fuzzy real number  $a$  is defined as a fuzzy subset of the basic set  $X$  of real numbers with the property that each level set  $[a]_\alpha$  is a compact interval,  $0 < \alpha \leq 1$ . See Fig. 1 for an example of a triangular fuzzy real number  $a$ ; depicted is the level set  $[a]_{1/2}$ .

In general, the graph of the membership function will be curved. However, as an approximation it often suffices to work with polygonal fuzzy numbers. Their graphs

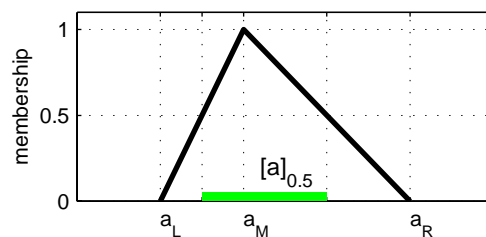


Figure 1: Triangular fuzzy number.

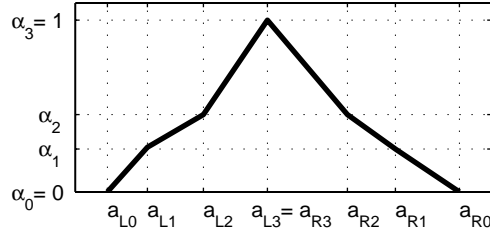


Figure 2: Polygonal fuzzy number.

are piecewise linear with corner points at  $a_{L0} \leq a_{L1} \leq \dots \leq a_{Ln} \leq a_{Rn} \leq \dots \leq a_{R1} \leq a_{R0}$  and corresponding levels  $0 = \alpha_0 < \alpha_1 < \dots < \alpha_n = 1$ , see Fig. 2.

Polygonal fuzzy numbers are denoted by  $a = \langle a_{L0}, a_{L1}, \dots, a_{Ln}, a_{Rn}, \dots, a_{R0} \rangle$ . Frequently used special cases are triangular fuzzy numbers  $\langle a_L, a_M, a_R \rangle$  as well as trapezoidal shapes. Compact intervals  $[a_L, a_R]$  can be viewed as fuzzy numbers with rectangular membership function. Among the more general fuzzy quantities are fuzzy vectors, in case the basic set  $X$  is the  $n$ -dimensional Euclidean space, or even fuzzy functions, in case  $X$  is a space of functions.

In scientific computations, parameters have to be inserted in functions. Thus the necessity arises of evaluating functions on fuzzy numbers (or vectors). This is achieved by means of the Zadeh extension principle [18], exhibited here for the case of a function  $z = f(x, y)$  of two variables. If  $a, b$  are fuzzy numbers, so will be the result  $f(a, b)$ . Its fuzzy value is determined by prescribing its membership function:

$$m_{f(a,b)}(z) = \sup_{z=f(x,y)} \min \{m_a(x), m_b(y)\}. \quad (2)$$

When using the possibilistic interpretation, the Zadeh extension principle is especially intuitive: In order to determine the membership degree of the dependent variable  $z$ , one considers all possible combinations  $(x, y)$  leading to  $z = f(x, y)$ . Each single combination arises with degree of possibility  $\min\{m_a(x), m_b(y)\}$ . For the final result, the maximal degree of possibility (the supremum) is decisive.

An essential computational tool is interval analysis on each  $\alpha$ -level set: Indeed, in case  $f$  is a continuous function, the  $\alpha$ -level set of  $f(a, b)$  is obtained by evaluating the image of the  $\alpha$ -level sets of  $a, b$  under the function  $f$ :

$$[f(a, b)]_\alpha = f([a]_\alpha, [b]_\alpha). \quad (3)$$

In case  $f$  is an arithmetic operation, this leads to simple formulae. For example, addition  $f(a, b) = a + b$  of triangular or polygonal fuzzy numbers is achieved by simply adding the abscissae of their corner points:

$$\langle a_L, a_M, a_R \rangle + \langle b_L, b_M, b_R \rangle = \langle a_L + b_L, a_M + b_M, a_R + b_R \rangle,$$

the result being again a triangular or polygonal fuzzy number. In the case of subtraction  $f(a, b) = a - b$ , a crosswise interchange is required:

$$\langle a_L, a_M, a_R \rangle - \langle b_L, b_M, b_R \rangle = \langle a_L - b_R, a_M - b_M, a_R - b_L \rangle.$$

For general operations  $f$ , the resulting membership function can be curved; the bounds of the  $\alpha$ -level sets are obtained by solving an optimization problem.

In network planning, the need arises to compare two or more fuzzy numbers. Here we face the difficulty that there is no total order on fuzzy real numbers, that is, it cannot be decided in general whether  $a \leq b$  or  $b \leq a$  (in contrast to the case of usual real numbers). A closer look at network planning shows that we actually need to compute  $\max(a, b)$  at nodes where two paths meet. This can be done by applying the Zadeh extension principle to the function  $f(a, b) = \max(a, b)$ . In the case of triangular or polygonal fuzzy numbers we approximate the result by taking the maximal value at each corner point of the membership function (in order to avoid the introduction of additional levels):

$$\max(a, b) = \langle \max(a_L, b_L), \max(a_M, b_M), \max(a_R, b_R) \rangle$$

and correspondingly for the minimum needed in the backward computation.

### 3 An application of fuzzy set theory in geotechnical engineering

#### 3.1 Preliminary remarks

In foundation engineering the design of mat foundations is just an ordinary task and it is certainly far from being classed as a special geotechnical job. At first glance one might be tempted to assume that the result of a raft design with well defined structural input data will fall into a narrow band of solutions. However, whereas the loading, the material parameter of the foundation structure and the requirements the foundation should meet, like allowable differential settlement, are well defined, there is generally a substantial lack of information concerning the soil. In some cases this deficiency of information serves as an excuse for simplified modelling and it is often argued that it is not worth using a possibly more appropriate and expensive model for the analysis of the problem at hand. On the other hand, even the most sophisticated model will not guarantee that the solution based on it will correctly predict all desired aspects of the foundation response. Hence, the decision about which model will be appropriate with respect to the importance of the project and the available soil data will very much depend on the expertise of the geotechnical engineer. Irrespective of both the vagueness of input data and the uncertainties with respect to the model, in today's practice the engineer will come up with crisp results. Here, fuzzy set theory opens new opportunities to reflect the lack of information and uncertainties in the results of engineering computations in a rational manner. In this section we will demonstrate the application of fuzzy set theory to the analysis of a foundation raft.

## 3.2 Material modelling

Constitutive equations or inequalities describe the response of materials. To specify a certain class of material with desired accuracy a sufficient number of such relations is required. The purpose of engineering constitutive models is not to give a mirror image of realistic material behavior but rather to describe the main mechanical properties, which are important for the design of constructions.

Constitutive relations consist of equations and inequalities which contain the basic principles of continuum mechanics (conservation of mass, momentum and energy) and of material theory (principle of frame invariance etc.). They must be satisfied exactly by the constitutive law. As these principles are not sufficient for the determination of all the variables involved in the material model, additional assumptions are required. These assumptions are based on the interpretation of material test data and thus they introduce an amount of uncertainty into the material model. For example elasticity, plasticity and damage characterize properties of idealized material behavior. In reality the existence of an elastic domain, the transition from elasticity to plasticity or the initiation of damage cannot be defined exactly. The theory of fuzzy sets offers a framework to model these various uncertainties in a consistent manner [6].

General constitutive relations are tensor valued functions of stress, strain, strain-rate and additional variables, which describe the mechanical state of the material. In order to simplify the constitutive law, material parameters are introduced replacing complicated functions of the variables by one single constant. As a consequence the material properties described by the function which is replaced by the constant will be captured by the numerical value of one single material parameter. Thus material parameters of simple models have to cover a larger bandwidth of values than material parameters of more refined models.

An additional source of uncertainty arises when the numerical values for material parameters are determined by carrying out material tests. Usually the constants introduced into the model are identified by minimizing a measure of error between theoretical (calculated) and experimental (measured) variables. Due to the mathematical structure of most nonlinear constitutive equations a global minimum of error is rarely found. In reality several equivalent solutions exist. Further, considering that experimental data are burdened by scatter and errors the results gained by the calibrated model contain some additional uncertainty.

## 3.3 Numerical model

It should be emphasized very clearly that using fuzzy set theory will in no way release the engineer from his job of establishing a correct mechanical model and using adequate numerical techniques to tackle the problem.

It is common sense that soil behavior is far from being adequately described as linear elastic, however, for the analysis of raft foundations it is usually justified to assume linear elastic soil response within the range of working loads. Although yielding eventually might occur in some confined regions of the soil they usually remain small

compared with the overall area of the soil-structure interface. In current engineering practice the Winkler model is probably most widely used to analyze rafts on elastic foundations. This is based much more on the fact that this model is very easy to handle and inexpensive both in terms of discretization and computation cost, rather than due to its mechanical merits. More reliable results are obtained by using a continuum model. Some of these models may even account for the increasing stiffness of the soil with depth.

In this example the soil is assumed to be adequately modelled as an isotropic non-homogeneous elastic medium. We therefore will adopt a continuum model with a power variation of Young's modulus  $E$  with depth like the one proposed by Booker et al [2], i.e., the elastic constants of the soil medium are given by

$$\begin{aligned} E(z) &= E_1 z^\rho, & 0 \leq \rho \leq 1 \\ \nu &= \text{const.} \end{aligned} \tag{4}$$

where  $E_1$  is a constant which determines Young's modulus at the depth  $z = 1$ ,  $\rho$  is referred to as the non-homogeneity parameter and  $\nu$  denotes Poisson's ratio. Eqn. (4) could be used for sand deposits where  $E$  is likely to vary nonlinearly with the overburden pressure. The raft, which also is assumed to behave elastically, is modeled by finite elements.

Numerically we are combining the finite element procedure with a boundary element solution. One of the main tasks is to determine the displacements of the non-homogeneous elastic half-space caused by a constant surface traction acting on an arbitrarily shaped area. In the context of the applied algorithm the shape of the loaded area depends on the shape of the finite element. Assuming that the boundary of the loaded domain  $\Omega$  can be approximated by a polygon consisting of  $k$  segments, as shown in Fig. 3, the vertical displacement  $u_z$  of a point  $(x, y, 0)$  on the soil surface due to a vertical traction  $p_z$  is given by

$$u_z(x, y) = \frac{Bp_z}{E_1} \sum_{i=1}^k \int_{L_i} \frac{un_\xi + vn_\eta}{(\rho - 1)R^{\rho+1}} ds. \tag{5}$$

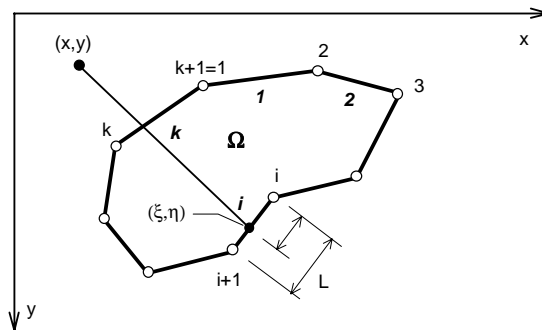


Figure 3: Polygonal approximation of the loaded area.

In the above equation  $B$  is a function of  $\rho$  and  $\nu$ ;  $u$ ,  $v$  and  $R$  measure the distance between source point and field point and  $n_\xi$  and  $n_\eta$  are the direction cosines of the actual segment. The integral in (5) can be evaluated numerically in a standard manner by applying Gauss-Legendre quadrature. Solutions for other displacement components due to loading in any direction are given by [15].

For rectangular shaped elements the displacement  $u_z$  can be found without performing any numerical integration at all making the procedure quite efficient. In the case of vertical loading within the domain  $\Omega$ ,  $u_z$  is given by

$$u_z(x, y) = \frac{B p_z}{E_1} \lambda \quad (6)$$

where  $\lambda$  is a function of  $(x, y)$  and is determined by evaluating  $\kappa$  for the boundaries of the loaded rectangle (see Fig. 4), i.e.

$$\begin{aligned} \lambda = & \kappa(x - x_1, y - y_1) - \kappa(x - x_1, y - y_2) + \\ & + \kappa(x - x_2, y - y_2) - \kappa(x - x_2, y - y_1). \end{aligned} \quad (7)$$

$\kappa$  is given by

$$\kappa = \frac{v \operatorname{sgn}(u) |v|^{-\rho} B_\zeta(a, b) + u \operatorname{sgn}(v) |u|^{-\rho} B_{(1-\zeta)}(a, b)}{2(1 - \rho)} \quad (8)$$

where  $B_\zeta(a, b)$  is the incomplete Beta function, its parameters given by

$$\zeta = \frac{u^2}{u^2 + v^2}, \quad a = \frac{1}{2}, \quad b = \frac{\rho}{2}. \quad (9)$$

For a more detailed derivation of all displacement components due to vertical and horizontal loading the reader is referred to [16].

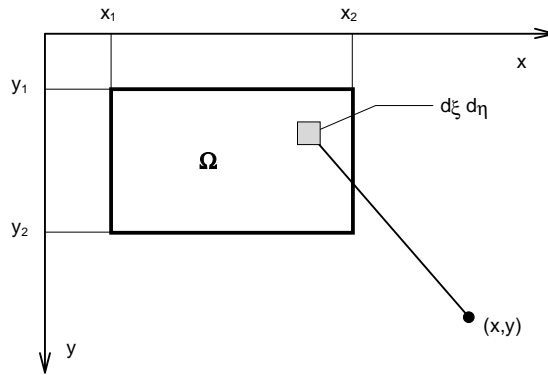


Figure 4: Uniformly distributed load over a rectangular area.

### 3.4 Numerical example

A rectangular raft with a flexural rigidity of 20460 kNm and an aspect ratio of 8 to 4 m on granular soil is considered. The elastic constants  $E_1$  and  $\nu$  and the exponent  $\rho$  determining the degree of non-homogeneity of the soil are assumed to be fuzzy numbers  $\tilde{E}_1$ ,  $\tilde{\nu}$  and  $\tilde{\rho}$  shown in Fig. 5. The raft is subjected to a uniform loading of 100 kPa. The interface is assumed to be smooth, i.e. no shear stresses are transmitted between raft and soil.

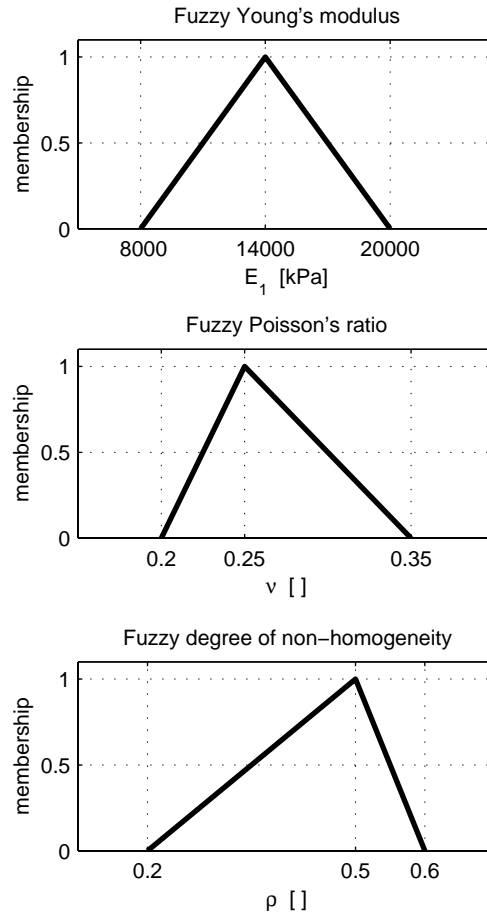


Figure 5: Membership functions of  $\tilde{E}_1$ ,  $\tilde{\nu}$  and  $\tilde{\rho}$ .

### 3.5 Calculation of the fuzzy solution

The numerical algorithm for crisp data has been presented in Section 3.3. Our task is to perform it with fuzzy data, producing a fuzzy output. Thus we shall have to

evaluate functions  $f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})$  where

- $f$  represents an output quantity such as displacement, stress or bending moment,
- $(x, y)$  is a point of the raft under consideration,
- $\tilde{E}_1, \tilde{\nu}$  and  $\tilde{\rho}$  are the fuzzy parameters.

As shown in Section 2 we can reduce this to a calculation of the image

$$[f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})]_\alpha = f_{(x,y)}([\tilde{E}_1]_\alpha, [\tilde{\nu}]_\alpha, [\tilde{\rho}]_\alpha) \quad (10)$$

using the  $\alpha$ -cuts. In general the function  $f_{(x,y)}$  does not depend monotonically on the parameters  $E_1, \nu$  and  $\rho$ , so it is not sufficient to use only the bounds of the  $\alpha$ -cuts for computing the bounds of  $[f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})]_\alpha$ . Instead of this we have to solve a global optimization problem. This has to be done for each desired point  $(x, y)$  – and also for each desired output quantity  $f$ .

To reduce the computational effort we approximate the function  $f_{(x,y)}$  on a 3-dimensional grid. The gridpoints are given by the Cartesian product  $S_{E_1} \times S_\nu \times S_\rho$  where  $S_{E_1}, S_\nu$  and  $S_\rho$  are discretizations of intervals which include the supports of the fuzzy parameters. For the above example the following sets are taken:

$$S_{E_1} = \{8000, 10000, 12000, \dots, 20000\} \quad (11)$$

$$S_\nu = \{0.2, 0.25, 0.3, 0.35, 0.4\} \quad (12)$$

$$S_\rho = \{0.0, 0.1, 0.2, \dots, 0.9\} \quad (13)$$

The FE-computation for a crisp triple  $(E_1, \nu, \rho) \in S_{E_1} \times S_\nu \times S_\rho$  using the above method results in  $f_{(x,y)}(E_1, \nu, \rho)$  for all desired points  $(x, y)$  and for all output quantities  $f$ . Doing this for all  $(E_1, \nu, \rho) \in S_{E_1} \times S_\nu \times S_\rho$  we get an approximation  $\hat{f}_{(x,y)}$  of  $f_{(x,y)}$  using linear interpolation. Using this approximation it is easy to compute approximative bounds of  $[f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})]_\alpha$  for all points  $(x, y)$ .

After performing this for all  $\alpha$ -cuts, e.g.  $\alpha \in \{0, 0.2, 0.4, \dots, 1\}$ , we get a fuzzy number  $f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})$  for each point  $(x, y)$ , e.g. for each point on a grid on the raft.

Caution: We have to treat each fuzzy number  $f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})$  separately from fuzzy numbers at other points, because we have neglected the interactions. So in general fuzzy numbers  $f_{(x',y')}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})$  at additional points  $(x', y')$  may not be calculated by interpolation, but interpolation can be used at the stage of the crisp FE-computation.

## 3.6 Visualizing the fuzzy solution

### 3.6.1 At single points $(x, y)$

To represent the value of a single fuzzy quantity at a single point, it suffices to plot the membership function. See Fig. 6 where the fuzzy bending moment  $\tilde{M}_x$  at the center of the raft is shown.

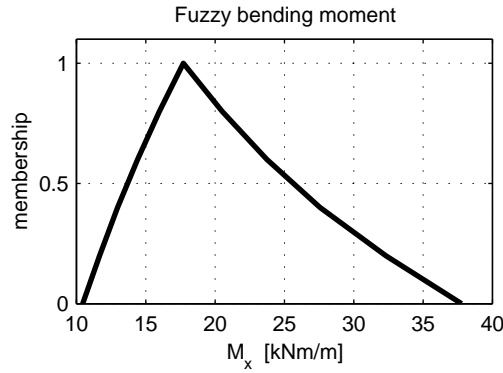


Figure 6: Membership function of  $\tilde{M}_x$ .

### 3.6.2 Along a section

Along the section we plot at each point, for which we have calculated the fuzzy output, the function values indicating the degree of membership by a gray-scale. White represents 0, light gray lower and dark gray higher degree of membership and finally black represents 1. See Fig. 7 where the fuzzy bending moment  $\tilde{M}_x$  on a section in  $x$ -direction through the middle of the raft is plotted. Taking the membership values of the fuzzy bending moment in Fig. 7 at the location  $x = 4$  leads to Fig. 6.

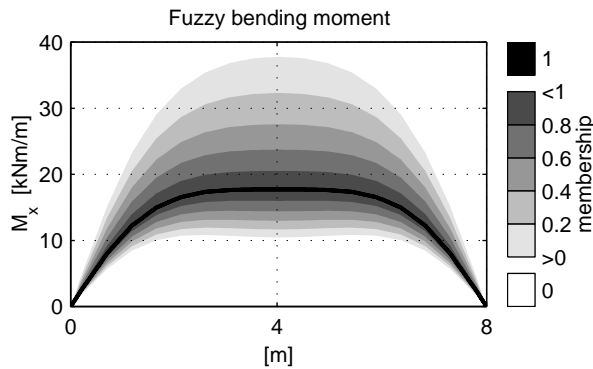


Figure 7: Fuzzy bending moment  $\tilde{M}_x$  along a section.

### 3.6.3 On the whole raft

To get an overall picture of the stresses or bending moments these quantities  $f$  are visualized on the whole raft using contour plots. Usually areas such as  $A = \{(x, y) :$

$c_1 \leq f_{(x,y)}(E_1, \nu, \rho) \leq c_2$  for fixed  $E_1$ ,  $\nu$  and  $\rho$  are colored to indicate lower or higher values of  $f$ . Here we use a fuzzy extension of this visualizing concept. Let  $\tilde{f}(x, y) := f_{(x,y)}(\tilde{E}_1, \tilde{\nu}, \tilde{\rho})$  be the fuzzy value at an arbitrary point  $(x, y)$  on the raft. We define the degree of membership of the fuzzy value  $\tilde{f}(x, y)$  to the crisp interval  $C = [c_1, c_2]$  by

$$m_C(\tilde{f}(x, y)) = \sup_{a \in C} m_{\tilde{f}(x, y)}(a), \quad (14)$$

cf. Fig. 8 showing an example with  $m_C(\tilde{f}(x, y)) = 0.5$ .

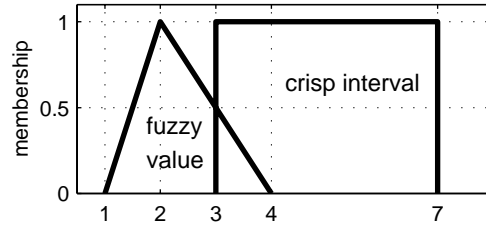


Figure 8: Fuzzy element of a crisp interval.

Performing this for all  $(x, y)$  on a grid on the raft we get a fuzzy set or area which itself is visualized by a contour plot. Fig. 9 and Fig. 10 show the degree of membership of the fuzzy bending moment  $\tilde{M}_x$  to the interval  $[7.5, 10]$  kNm/m and  $[10, 12.5]$  kNm/m, respectively.

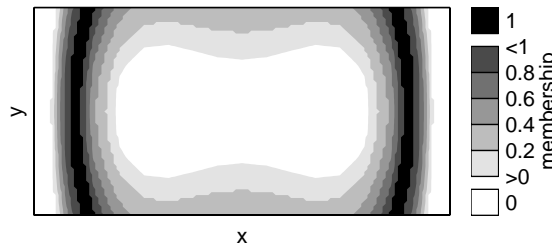


Figure 9:  $\tilde{M}_x \in [7.5, 10]$  kNm/m.

*Remark:* The areas plotted black in Fig. 7, 9 and 10 represent the output with membership degree 1. This corresponds to the crisp output  $M_x$  for  $E_1 = 14000$  kPa,  $\nu = 0.25$  and  $\rho = 0.5$ , cf. Fig. 5. In Fig. 6 the value  $M_x = 17.71$  kNm/m with membership degree 1 also represents the crisp solution using the above parameters. This shows the great loss of information if uncertainties are neglected and the analysis is done just using crisp soil parameters.

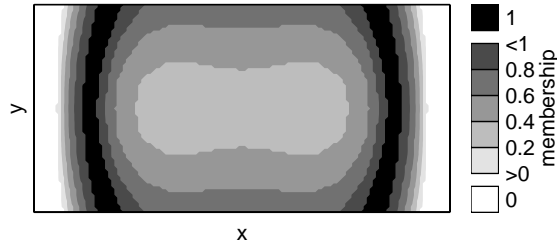


Figure 10:  $\tilde{M}_x \in [10, 12.5]$  kNm/m.

### 3.7 Determining membership functions

In the numerical example of Section 3.4, membership functions of the fuzzy parameters  $\tilde{E}_1$ ,  $\tilde{\nu}$ , and  $\tilde{\rho}$  have been taken as triangular fuzzy numbers, for the sake of exposition. In practical applications, the membership functions can be constructed from sample data obtained from site investigation and laboratory testing as well as geotechnical judgement provided by the engineer. Various methods for fuzzy data aggregation have been suggested in the literature (see e.g. [1, 3]). We are going to elaborate on one of the approaches, say, for the case of Young's modulus  $E_1$ . Assume that in a cross section parallel to the  $x$ -axis of the part of soil in question of length  $L$  three measurements have been taken at points  $x_1, x_2, x_3$ , yielding three intervals  $I_1, I_2, I_3$  for the parameter  $E_1$ . If no additional information on the distribution of  $E_1$  over the length  $L$  is given, one might define the membership function  $m_{\tilde{E}_1}(E'_1)$  of the fuzzy parameter  $\tilde{E}_1$ , at a given value  $E'_1$ , as  $\frac{1}{3}$  the number of intervals  $I_j$  in which  $E'_1$  is contained. Thus,  $m_{\tilde{E}_1}(E'_1) = 1$  if  $E'_1$  appears as a value in all measurement intervals  $I_1, I_2, I_3$ ,  $m_{\tilde{E}_1}(E'_1) = \frac{2}{3}$  if  $E'_1$  appears in two of the intervals, and so on, see Fig. 11.

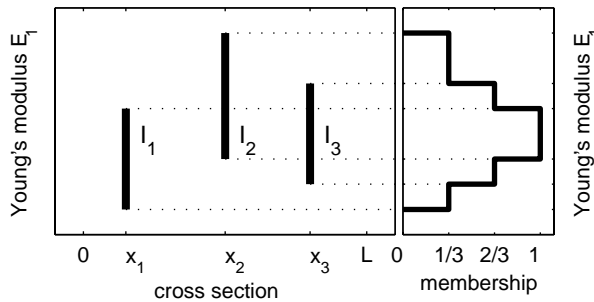


Figure 11: Determination of fuzzy number  $\tilde{E}_1$ .

On the other hand, in case more geotechnical information on the approximate distribution of  $E_1$  is available or can be estimated from further indications, one might describe the conjectured distribution over the length  $L$  by a band in the  $(x, E_1)$ -plane. A piecewise linear extrapolation is sketched in Fig. 12.

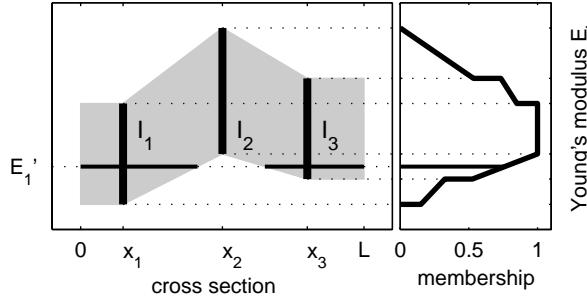


Figure 12: Determination of fuzzy number  $\tilde{E}_1$ .

To determine the membership degree  $m_{\tilde{E}_1}(E_1')$  of a given value  $E_1'$ , the length of the broken horizontal at height  $E_1'$  cut out by the boundaries of the shaded band is measured and divided by  $L$ . For simplification, the result can be approximated by a triangular or trapezoidal fuzzy number. For computational purposes, one could place a rectangular subdivision on the  $(x, E_1)$ -plane and just count the number of rectangles met by the shaded region at each height. Here we have presented the procedure in a one-dimensional case; it extends in an obvious fashion to the 2- and 3-dimensional situation.

At this point, an important modelling question arises. Namely, in the fuzzy FE-model, we work with a constant, albeit fuzzy parameter  $\tilde{E}_1$ . On the other hand, measurements of  $E_1$  have exhibited fluctuations in certain intervals  $I_j$ . The question is the meaning of the measurements in the context of the model. There are two possibilities:

- (i) The parameter  $E_1$  is approximately constant in reality, and the variations  $I_j$  arise from measurement uncertainties. In this case, the use of a constant, fuzzy  $\tilde{E}_1$  is fully justified. The membership function simply reflects our information on the measurement uncertainties.
- (ii) The parameter  $E_1$  is not constant, and the fluctuations in our measurements indicate physical variations over the length  $L$ . In this case, the actual displacements and stresses might not be covered by a computation using a fuzzy constant  $\tilde{E}_1$ , even on  $\alpha$ -level zero. This problem has to be faced by any modelling procedure, fuzzy or not. It concerns the uncertainty or lack of knowledge about the actual functional dependence of the parameter  $E_1$  on the location along length  $L$ , which, in our model, is absorbed in the fuzziness of the assumed constant

$\tilde{E}_1$ . Preliminary results of a comparative case study under way show that linear variations of  $E_1$  are covered by fuzzy constants, but more drastic fluctuations might lead to bending moments numerically outside the fuzzy range, yet still qualitatively predicted.

## 4 Fuzzy differential equations

In this section we report on work in progress on dynamical problems. We are concerned with models described by systems of differential equations

$$\begin{aligned}\frac{dx(t)}{dt} &= F(t, x(t), b) \\ x(0) &= a.\end{aligned}\tag{15}$$

Here  $t$  denotes time, and  $x = (x_1, \dots, x_n)$  is the state vector of the system. The function  $F$  is assumed to be known formally, but may contain fuzzy parameters  $b = (b_1, \dots, b_m)$ ; the initial state  $x(0) = a$  could be a fuzzy vector as well. Typically, these systems arise in structural mechanics, the vector  $x(t)$  comprising displacements and velocities of the nodes of the structure. Further engineering applications include dynamical problems in continuum mechanics (subjected to a spatial discretization), problems of heat conduction described by Newton's law or the time evolution of Markovian probabilities in queueing, maintenance and reliability models.

The parameters and data in problem (15) being given by fuzzy vectors, the solution  $x(t)$  at any point of time  $t$  will be a fuzzy vector as well and the trajectory of the system  $t \rightarrow x(t)$  in state space will be a fuzzy function. Our method of computation is by means of the Zadeh extension principle. Assuming that the initial value problem (15) can be solved uniquely when the data and parameters  $(a, b)$  are usual numbers, we can assert that the solution is given as a continuous function of the data and parameters

$$x(t) = L_t(a, b).\tag{16}$$

It is this function  $L_t$  to which we apply the extension principle. Thus the  $\alpha$ -level set of the fuzzy solution  $x(t)$  at time  $t$  is given by

$$[x(t)]_\alpha = L_t([a]_\alpha, [b]_\alpha).\tag{17}$$

This shows that the solution concept above produces information of engineering interest: if the data and parameters fluctuate in the sets  $[a]_\alpha, [b]_\alpha$  with degree of possibility  $\alpha$ , then the state of the system at time  $t$  is confined to the level set  $[x(t)]_\alpha$ . This way the assessment of the variations of the input parameters is faithfully processed and reflected in the fuzzy output. In addition,  $x(t) = L_t(a, b)$  can be seen as the unique fuzzy solution corresponding to a fuzzy solution concept for system (15), obtaining further mathematical justification this way [11].

As a simple illustrative example, consider the displacement  $x(t)$  of a mass  $m$  under the influence of a linear spring with stiffness  $k$ . It is described by the second order

differential equation

$$m \frac{d^2 x(t)}{dt^2} + kx(t) = 0. \quad (18)$$

Assuming that parameters  $m$  and  $k$  are fuzzy while the initial data  $x(0) = 0$ ,  $dx(0)/dt = 1$  are known precisely, the fuzzy solution is given by

$$x(t) = L_t(m, k) = \frac{k}{m} \sin\left(\frac{m}{k}t\right). \quad (19)$$

Fig. 13 depicts a certain fuzzy parameter  $m/k$ , Fig. 14 and 15 the corresponding fuzzy displacement  $x(8)$  at time  $t = 8$  (polygonal approximation), respectively  $\alpha$ -level sets for part of the fuzzy trajectory.

The computation proceeds as follows: First, trajectories  $t \rightarrow L_t(m, k)$  are computed corresponding to an array of values  $m/k$ . Next, the bounding curves of the level trajectories  $[t \rightarrow x(t)]_\alpha$  are constructed as envelopes of the trajectories arising from parameter values in level set  $[m/k]_\alpha$ . Finally, the membership function of  $x(t)$  at fixed points of time  $t$  is obtained by projection. More efficient numerical algorithms involving interpolation, evolution properties and piecewise monotonicity of the membership functions are currently being developed [12].

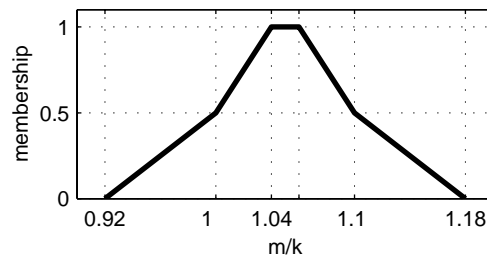


Figure 13: Fuzzy parameter  $m/k$ .

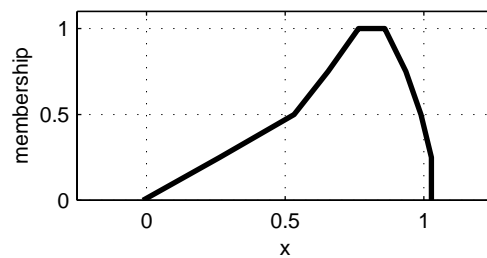


Figure 14: Fuzzy displacement  $x(8)$ .

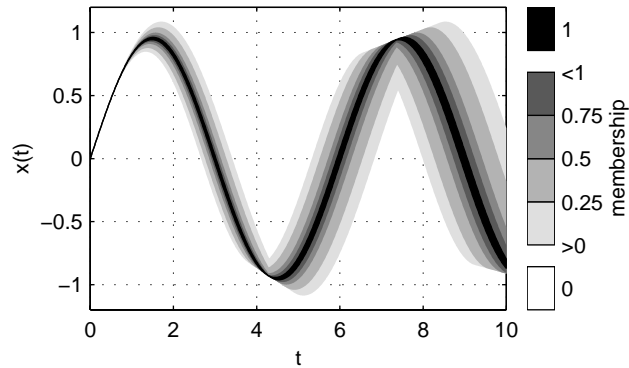


Figure 15: Fuzzy trajectory.

As a final observation, we note that from the fuzzy trajectory as a primary object, various secondary quantities of interest can be computed, for example: maximal displacement at level  $\alpha$ , resonance frequency, spectral coefficients and so on.

## 5 Fuzzy data analysis in project planning and construction management

Fuzzy methods can be a valuable help in network planning. They enable the engineer to incorporate his information on the uncertainties of the available data and his assessment of future conditions. They provide a tool for monitoring and control, and do not, after all, give the false impression of precision in the project schedule that can never be kept up in reality.

Basic tools in fuzzy network planning and its application to engineering projects have been developed in [9]. In this section we shall elaborate on three additional topics of practical interest: possibilistic modelling of geological data in a tunnelling project; aids for project monitoring; questions of time/cost optimization.

### 5.1 Time estimate for a tunnelling project: an example

Data for the subsequent example come from a preliminary investigation at the site of a projected road tunnel at the German/Austrian border in geologically challenging terrain. We contrast our approach [7] with a previous study [13], in which the probabilistic PERT-technique had been employed. The total extension of the tunnel of approximately 1250 m was divided into 16 sections, according to geological criteria. For each section, a geologist had provided a verbal description plus estimated percentages of the rock classes to be expected. For example, section 2 of 340 m length

was classified as 80% slightly fractured rock and 20% fractured rock. A deterministic engineering estimate yielded driving times for each section and rock class. For example, completion of section 2 was estimated at 60 days, provided only slightly fractured rock was encountered, and at 81 days under conditions of fractured rock. In the PERT-analysis, the duration of each section was interpreted as a discrete random variable with elementary probabilities defined by the given percentages. For example, this way the expected duration for section 2 was computed to  $0.8 \cdot 60 + 0.2 \cdot 81 \approx 64$  with standard deviation  $\approx 8.4$ . In section 8, risk of tunnel failure was presumed and in sections 7 and 9, risk of water inrush. In the PERT-analysis, the corresponding delays were modelled in a similar probabilistic way.

*Tunnelling durations as triangular fuzzy numbers:* We argue that possibility theory provides a viable alternative. The key to our approach is the interpretation of the percentages as fuzzy ratios. In our treatment of the tunnelling project, we assigned membership degree 1 to the ratios proposed by the geologist, that is 80 : 20 in section 2, for example. In the subsequent analysis, we estimated the ratios defining the bounds for the domain of membership degree zero; in section 2, 90 : 10 and 50 : 50. This resulted in the triangular fuzzy number  $\langle 62, 64, 70 \rangle$  for the tunnelling duration in section 2, and similarly for the other 15 sections. Risk of tunnel failure in section 8 was analyzed separately. In particular, the possible occurrence of one major tunnel failure and up to two minor ones was taken into account, with corresponding delays modelled by triangular fuzzy numbers as shown in Fig. 16.

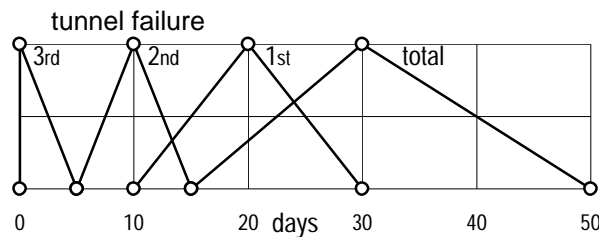


Figure 16: Delay caused by tunnel failure.

The sum of these prognoses for possible delays was added to the driving duration of section 2. Further delays due to water inrush in sections 7 and 9 were estimated in a similar way and the respective durations were modified accordingly.

We would like to point out that the fuzzy approach allows the incorporation of information going beyond probability distributions. For example, at each transition of the rock classes, individual delays are due to change of the cross-sectional area of the tunnel, change in equipment, safety regulations to be observed and so on. The planning engineer can assess these individual circumstances from previous experience, from specific enterprise data, from discussions with experts involved in the construction process. The information gathered in this way can be subsumed under a formulation by means of fuzzy numbers.

*Total duration:* The linear structure of the tunneling process is described by a serial

network consisting of one path only and 16 nodes for the sections. The total project duration is obtained by simply adding the individual durations, resulting here in a triangular fuzzy number. In contrast to this, in the probabilistic approach, expectation values and variances are added, assuming stochastic independence of the individual activities. As is customary in the PERT-technique, the total duration is assumed to be normally distributed. The two results are contrasted in Fig. 17.

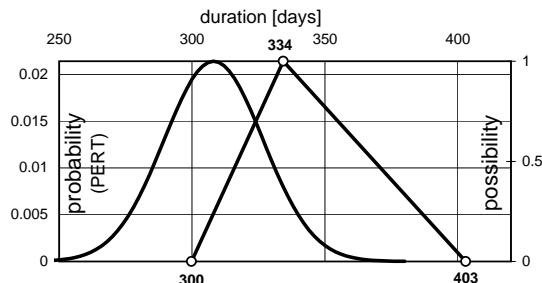


Figure 17: Probability/possibility distribution of total duration.

The deviation of the central value (membership degree 1) in the fuzzy approach from the expectation value in the probabilistic approach is mainly a consequence of different handling of the exceptional risks in sections 7, 8 and 9. We emphasize that the meaning of the two graphs is totally different; the determining nodes of the triangular fuzzy number directly reflect the risk assessment performed in the analysis, the height of the curve representing the estimated degree of possibility associated with each duration. On the other hand, the area under the probability distribution curve defines the probability that the total duration appears in a certain interval. In view of the various artificial stochastic hypotheses entering in the PERT-algorithm, it is questionable whether it allows a direct interpretation relevant for managerial decisions.

As with most construction projects, the underlying uncertainties are not of a statistical nature. The percentages provided by the geologist are neither samples from a large number of completed tunnels, nor are they statistical averages from a large number of exploratory borings along the prospective tunnel route. They are nothing but subjective estimates based on expertise. Thus it appears more appropriate to translate them into a possibilistic rather than a probabilistic formulation.

## 5.2 Aids for monitoring

In serial networks such as, for example, arise in tunnelling projects, a fuzzy time/velocity diagram may be taken as a monitoring device for the unfolding of the construction. It simply describes the fuzzy point of time when a certain position along the tunnel route should be reached. The diagram in Fig. 18 reflects all uncertainties taken into account when the project starts.

As construction progresses, the uncertainties are narrowed down step by step. The

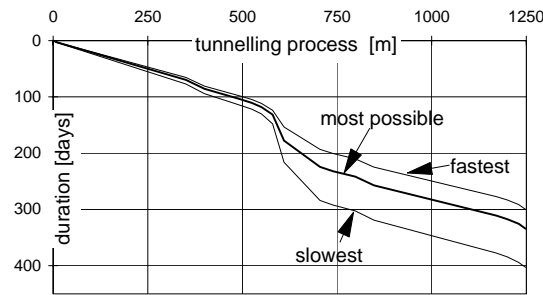


Figure 18: Time/velocity diagram.


diagram can be actualized by a simple cancellation of the design uncertainties, once a definite state has been reached.

In a branching network, a time/velocity diagram might not contain enough information. Here it is essential to assess the criticality of activities or branches. In deterministic network planning, the slack time for each activity is computed by a backward pass through the graph from the desired completion date, and criticality means slack zero. As explained in detail in [9], the backward pass with fuzzy durations no longer yields the slack of each activity, but rather its critical potential. We prefer to call the fuzzily computed slack *range of uncertainty*. Negative range of uncertainty implies a certain possibility that delay of the completion date may be caused at the respective activity. Numerically, the *critical potential* is defined as the possibility degree of zero range of uncertainty.

This opens the way for enhancing the network presentation by shading (or coloring) areas of different criticality in the network (see Fig. 19, where an example of a project plan for a sewage plant is presented).

Such a presentation uncovers and emphasizes the uncertainties and can help the construction manager to assess rapidly which activities may become critical. In the course of the realization of the project, the diagram can be updated continually, thereby recording shifts in criticality and making it possible to recognize trends early. This is the central objective of monitoring and control, and it is the basis for taking adequate measures in order to avert developments endangering the timely completion of the project or its economic success. As opposed to deterministic planning methods, the project uncertainties do not disappear in the “black box” of an algorithm. The fuzzy network representation may aid all persons concerned with the project in strategic considerations.

Figure 19: Fuzzy network.

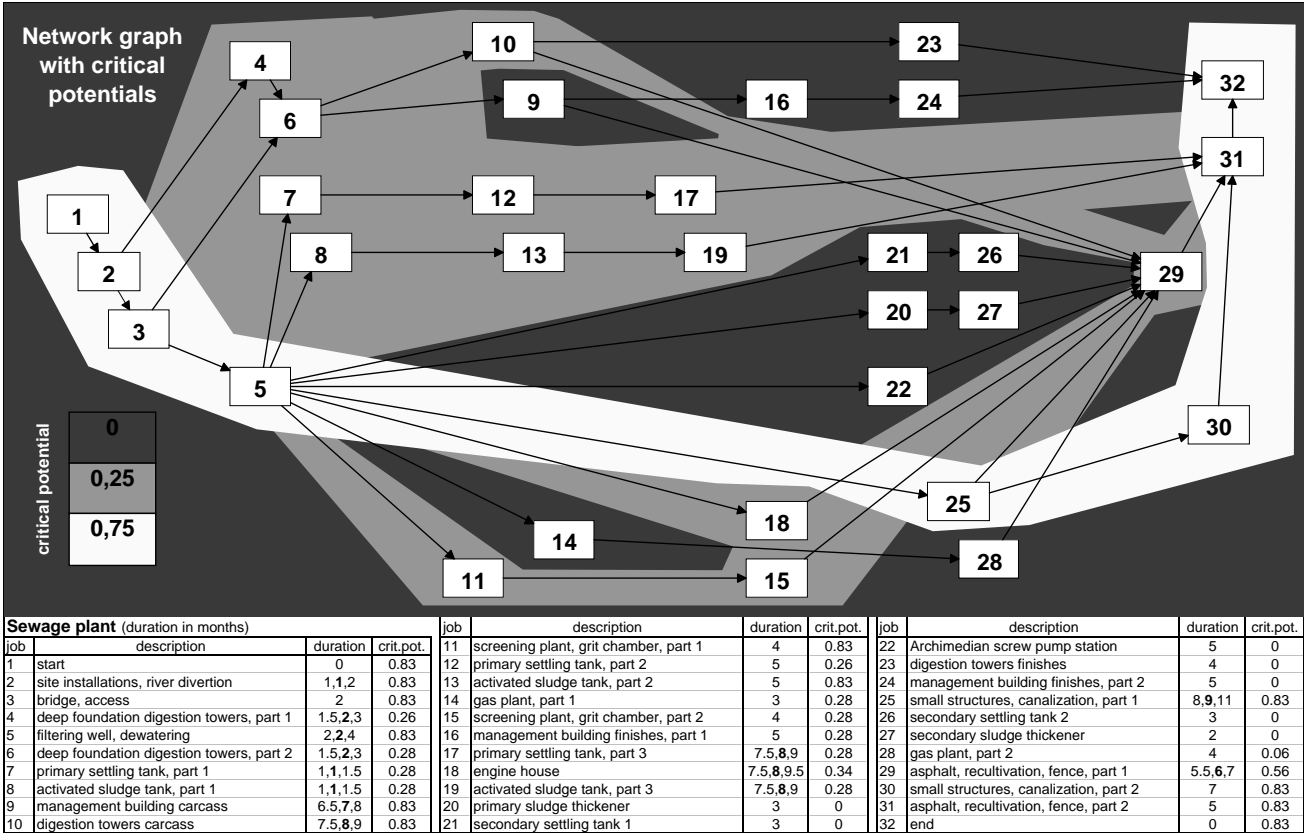

### 5.3 Construction time and cost

In this subsection we address the following: Is it possible to design and implement a cost optimal project plan? There are many parameters to be varied:

- (i) we can change the overall method of construction;
- (ii) given a construction method, we can change its internal structure, the temporal and causal interdependencies of the individual activities;
- (iii) given a fixed project structure, we can vary the costs of individual activities by acceleration, deceleration and resource modification.

It is clear right away that possibilities (i) and (ii) allow an infinity of variations, depending on the inventiveness of the designing engineer. No single solution can be guaranteed to be optimal; an absolutely optimal construction method or project structure simply does not exist. For the discussion to follow, we therefore concentrate on point (iii) which already features all difficulties (see [8]).

Thus we assume a fixed network structure chosen for the project plan. We want to optimize costs by changing the duration of the activities. As a precondition, we must know the effects of resource modification on the time/cost relation of the activities. This is a major source of uncertainty and will be discussed below. We first have a look at the standard deterministic approach to this optimization problem. The basic assumption is that for each of the activities  $A_i, i = 1, \dots, n$ , the time/cost relation is known. We denote by  $C_i(D_i)$  the cost of activity  $A_i$  when performed at duration  $D_i$ . Further, the duration  $D_i$  of activity  $A_i$  ranges between certain upper and lower bounds:

$$D_{iL} \leq D_i \leq D_{iR}. \quad (20)$$

Each choice of duration  $D_1, \dots, D_n$  for the activities results in a total duration  $T$  of the project, determined by the activities on the corresponding critical paths. The smallest and largest possible project durations  $T_{\min}, T_{\max}$  are obtained by performing all activities in minimal time  $D_{iL}$ , or maximal time  $D_{iR}$ . There is an external time limit on the total duration  $T$ , given by the required deadline  $T_e$  and the commencement date  $T_b$ :  $T$  must be smaller than the difference  $T_e - T_b$ . This results in the constraint on the total duration:

$$T_L \leq T \leq T_R \quad (21)$$

where  $T_L = T_{\min}$  and  $T_R$  is the smaller of the two values  $T_{\max}$  and  $T_e - T_b$ . The standard optimization proceeds in two steps.

*Step 1: cost optimization at fixed project duration  $T$ .* The duration  $T$  is attained by many different combinations of individual durations  $D_1, \dots, D_n$ . For each combination, we get a corresponding total cost

$$C_T(D_1, \dots, D_n) = \sum C_i(D_i). \quad (22)$$

The objective is to minimize  $C_T(D_1, \dots, D_n)$  subject to constraint (20): This results in the minimal cost  $C(T)$  at fixed project duration  $T$ .

*Step 2: optimizing the total project duration.* In this step, we simply choose the project duration  $T^*$ , subject to constraint (21), such that the corresponding total cost  $C(T^*)$  is the least among all minimized costs  $C(T)$ .

Under various assumptions on the time/cost relationships  $C_i(D_i)$ , this standard optimization procedure has been extensively dealt with in the literature (see e.g. [10]). It seems we have solved the problem. However, we shall see in the simple example below that the combinatorial structure of the possibilities leading to optimal duration  $T^*$  becomes tremendously complex with the increasing size of the project. The construction manager would be required to control the construction process in such a way that each activity runs precisely the duration ultimately producing minimal costs  $C(T^*)$ . This is impossible. Therefore, the information obtained by the standard optimization procedure is useless.

*Time/cost analysis:* We turn to fuzzy modelling of the duration dependent costs of a single activity  $A_i$ . The costs  $C_i(D_i)$  required to complete this activity in a certain time  $D_i$  are described by a triangular fuzzy number, see Fig. 20.

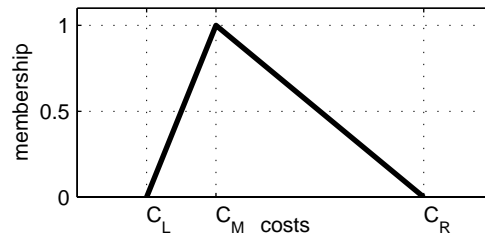


Figure 20: Membership function for cost of activity at fixed duration.

The planning engineer might first arrive at the central value  $C_M$  with membership degree 1 by employing the standard deterministic computations from construction management data. Then a risk analysis might provide the lowest possible costs  $C_L$  and a largest bound  $C_R$  for the estimated costs. Of course, further subdivision of risk levels can provide a refined analysis (this was carried through e.g. in [9]), but as a first approximation, a triangular fuzzy number may satisfactorily reflect the cost fluctuations under risk.

Next, we discuss the cost distribution as the duration  $D_i$  of activity  $A_i$  varies in its bounds  $D_{iL}, D_{iR}$ . An example of such a diagram is shown in Fig. 21, exhibiting 0-level and 1-level curves of the fuzzy cost  $C_i(D_i)$ .

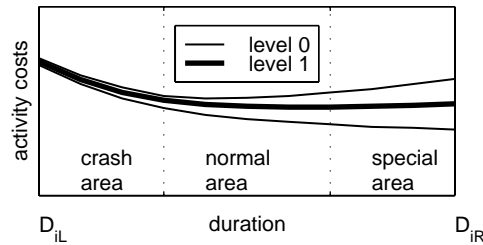


Figure 21: Fuzzy time/cost dependence.

We can distinguish three regimes of the time/cost dependence:

- (i) *Normal area*: This is the normal range for completing the activity. Costs for equipment, labor and material and costs for site overhead are balanced.
- (ii) *Crash area*: The acceleration of the activity causes the costs for equipment, labor and material to predominate. The increase of capacities may cause interference and unintended obstructions, thereby further raising costs uneconomically. In any case, a progressive cost development is to be expected when the activity duration is pushed to its lower limit.
- (iii) *Special area*: The largest uncertainties arise in this range. Costs for maintaining the construction site at minimum capacity may be high or low, depending very much on the specific project and circumstances.

We point out that the diagram in Fig. 21 depicts but one of the many time/cost relationships that can arise. They typically are nonlinear, but may even have discontinuities. For example, to achieve a certain acceleration, the construction process may have to be changed, additional machinery may be required, or shift-work may have to be introduced.

*Example*: As an illustrative example, we consider a simple serial network consisting of the three activities: excavation ( $A_1$ ), foundation ( $A_2$ ) and mat construction ( $A_3$ ), see Fig. 22.

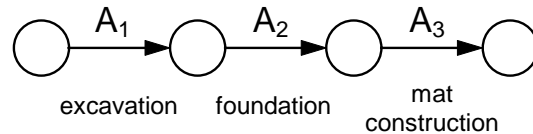


Figure 22: Serial network.

The durations  $D_i$  of each activity vary in an interval  $[D_{iL}, D_{iR}]$  and thus can be described by a rectangular fuzzy number. We choose  $[D_{1L}, D_{1R}] = [3, 8]$ ,  $[D_{2L}, D_{2R}] =$

$[D_{3L}, D_{3R}] = [7, 12]$ . For each activity, a time/cost relationship as in Fig. 21 is assumed. The resulting total duration is the sum of the three duration intervals and thus may vary in the interval  $[17, 32]$ . For computational simplicity, we allow only integer values for each duration. Following the pattern of the deterministic optimization algorithm, we first choose a fixed duration  $T$  in the interval  $[17, 32]$  and determine the combinations of individual durations  $D_1, D_2, D_3$  summing up to  $T$ . Each combination requires a cost of  $C_T(D_1, D_2, D_3) = C_1(D_1) + C_2(D_2) + C_3(D_3)$ , represented by a triangular number. Superposition of these triangular numbers shows the cost variations that can arise if the total project duration is  $T$  ( $T = 29$  in Fig. 23).

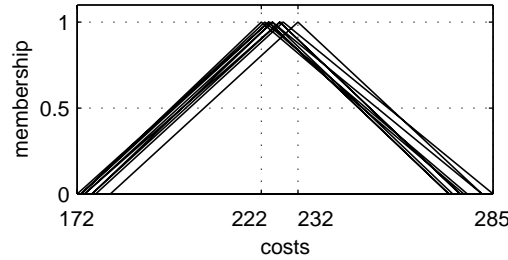


Figure 23: Fuzzy cost variations at duration  $T = 29$ .

The envelope of these triangular numbers can be approximated by a trapezoidal number, see Fig. 24.

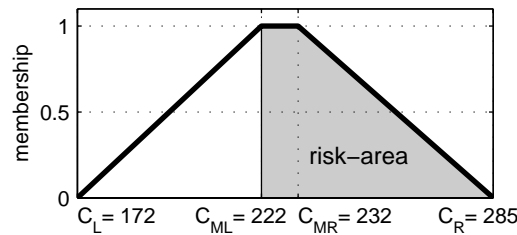


Figure 24: Risk assessment of range of costs.

We note that the boundaries  $C_{ML}, C_{MR}$  of the central plateau arise already from the combinatorial possibilities when all activities run at deterministic costs  $C_{iM}$  (membership degree 1). Thus the shaded region can be considered as an indicator of the economic risk the designing engineer has to face. To assess the risk of economic failure, the engineer should examine the combinations of activity durations leading up to the characterizing values  $C_{ML}, C_{MR}, C_R$ , respectively. The number of these combinations grows fast with the project size. Thus in practice this is an impossible task.

One must be content with the indications extractable from the diagram and estimates from a detailed study of a few extremal cases.

*Three-dimensional presentation:* To each attainable total duration  $T$  in the interval  $[T_L, T_R]$  there are corresponding costs described by a trapezoidal fuzzy number as in Fig. 24. We can collect these in a 3-dimensional diagram, see Fig. 25.

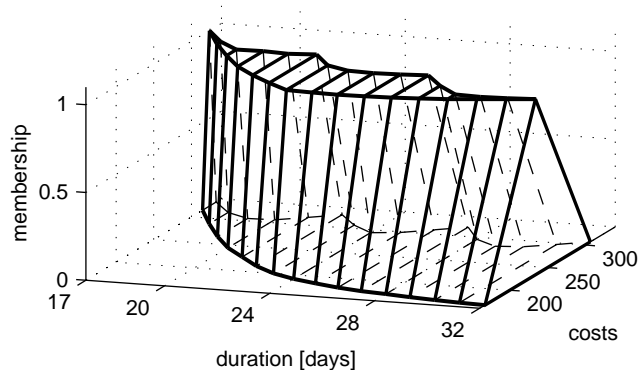


Figure 25: Time/cost/possibility diagram.

The height of the resulting surface over a point  $(T, C)$  shows the degree of possibility that the project duration is  $T$  with project costs  $C$ . The trapezoidal number in Fig. 24 arises as a cross-section of the surface at fixed duration  $T$ . The plateau area of possibility degree 1 embraces the time/cost combinations attained when all activities run at deterministic cost  $C_{iM}$ . This 3-dimensional graph puts in evidence the domain in which cost and duration of the project may vary, when the duration of each single activity has been modeled by a rectangular fuzzy number, single costs by a triangular fuzzy number and the time/cost relation by a diagram as in Fig. 21. Accelerating or decelerating single activities will move the result within the boundaries of this domain.

*Final Remark:* We realize from these considerations that in a time/cost analysis with fuzzy data a large variety of possible results with different membership degrees arise, already in a simple example involving three activities only. In view of this observation it is clear that the goal of classical optimization – the search for and the implementation of a cost optimal project plan – cannot be achieved. Not only is it legitimate from a modelling perspective to assume that cost and duration data are fuzzy, but in real life construction projects the only type of data available are fuzzy data. We may conclude that with respect to cost and duration of construction projects, one cannot strive for optimization, but rather should attempt to achieve a reasonable solution within the limitations of the given risks and uncertainties.

These considerations also show that text book strategies to accomplish a certain result do not exist, but every measure and its effects have to be evaluated in each

specific situation. Frequently heard statements such as “Reduction of the construction period will reduce costs” have no validity, with the possible exception of specific projects where they may have resulted from a thorough investigation of the determining factors. It is essential that the designing engineer consider the data and project uncertainties from the earliest planning phase onwards, so as to have a firm basis for the assessment of the risk of economic failure.

As the economist H. A. Simon puts it [14],

“... exact solutions to the larger optimization problems of the real world are simply not within reach or sight. In the face of this complexity the real-world business firm turns to procedures that find good enough answers to questions whose best answers are unknowable. Thus normative microeconomics, by showing real-world optimization to be impossible, demonstrates that economic man is in fact a satisficer, a person who accepts ‘good enough’ alternatives, not because he prefers less to more but because he has no choice.”

## References

- [1] H. Bandemer and W. Näther. *Fuzzy Data Analysis*. Kluwer, Dordrecht, 1992.
- [2] J.R. Booker, N.P. Balaam, and E.H. Davis. The behaviour of an elastic, non-homogeneous half-space. Part I – Line load and point loads. *Int. J. num. analytical Meth. Geomechanics*, 9:353–367, 1985.
- [3] D. Dubois and H. Prade. *Possibility Theory*. Plenum Press, New York, 1988.
- [4] Th. Fetz. Finite element method with fuzzy parameters. In I. Troch and F. Breitenacker, editors, *Proceedings IMACS Symposium on Mathematical Modelling, Vienna 1997*, volume 11 of *ARGESIM Report*, pages 81–86, 1997.
- [5] Th. Fetz, M. Hofmeister, G. Hunger, J. Jäger, H. Lessmann, M. Oberguggenberger, A. Rieser, and R. Stark. Tunnelberechnung – Fuzzy? *Bauingenieur*, 72:33–40, 1997.
- [6] M. Klisinski. Plasticity theory based on fuzzy sets. *Journal of Engineering Mechanics*, 114(4):563–583, 1988.
- [7] D. Köll. Netzplanberechnung mit unscharfen Zahlen. Diplomarbeit, Universität Innsbruck, 1997.
- [8] G. Krenn. Kosten und Bauzeit. Eine Untersuchung über Zusammenhänge mit Fuzzy-Methoden. Diplomarbeit, Universität Innsbruck, 1996.
- [9] H. Lessmann, J. Mühlögger, and M. Oberguggenberger. Netzplantechnik mit unscharfen Methoden. *Bauingenieur*, 69:469–478, 1994.

- 
- [10] K. Neumann. *Operations Research Verfahren*, volume 3. Carl Hanser Verlag, München, 1975.
  - [11] M. Oberguggenberger. Fuzzy differential equations. In I. Troch and F. Breitenecker, editors, *Proceedings IMACS Symposium on Mathematical Modelling, Vienna 1997*, volume 11 of *ARGESIM Report*, pages 75–80, 1997.
  - [12] S. Pittschmann. Lösungsmethoden für Funktionen und gewöhnliche Differentialgleichungen mit unscharfen Parametern. Diplomarbeit, Universität Innsbruck, 1996.
  - [13] S. Plankensteiner. Unsicherheiten im Projektablauf, Fallbeispiel: Grenztunnel Füssen-Vils. Diplomarbeit, Universität Innsbruck, 1991.
  - [14] H.A. Simon. *The Science of the Artificial*. MIT Press, Cambridge, 1981.
  - [15] R.F. Stark and J.R. Booker. Surface displacements of a non-homogeneous elastic half-space subjected to uniform surface tractions. Part I – Loading on arbitrarily shaped areas. *Int. J. num. analytical Meth. Geomechanics*, 21, 1997. To appear.
  - [16] R.F. Stark and J.R. Booker. Surface displacements of a non-homogeneous elastic half-space subjected to uniform surface tractions. Part II – Loading on rectangular shaped areas. *Int. J. num. analytical Meth. Geomechanics*, 21, 1997. To appear.
  - [17] P.-A. Von Wolffersdorf. Feldversuch an einer Spundwand im Sandboden: Versuchsergebnisse und Prognosen. *Geotechnik*, 17:73–83, 1994.
  - [18] L. Zadeh. Fuzzy sets. *Information and Control*, 8:338–353, 1965.